


# Power: Quick Specs



## Overview

The PB13016-01 provides single phase power distribution utilizing a combination of (16) NEMA 5-20 outlets. Mounting is achieved in seconds using included tool-less mounting buttons.

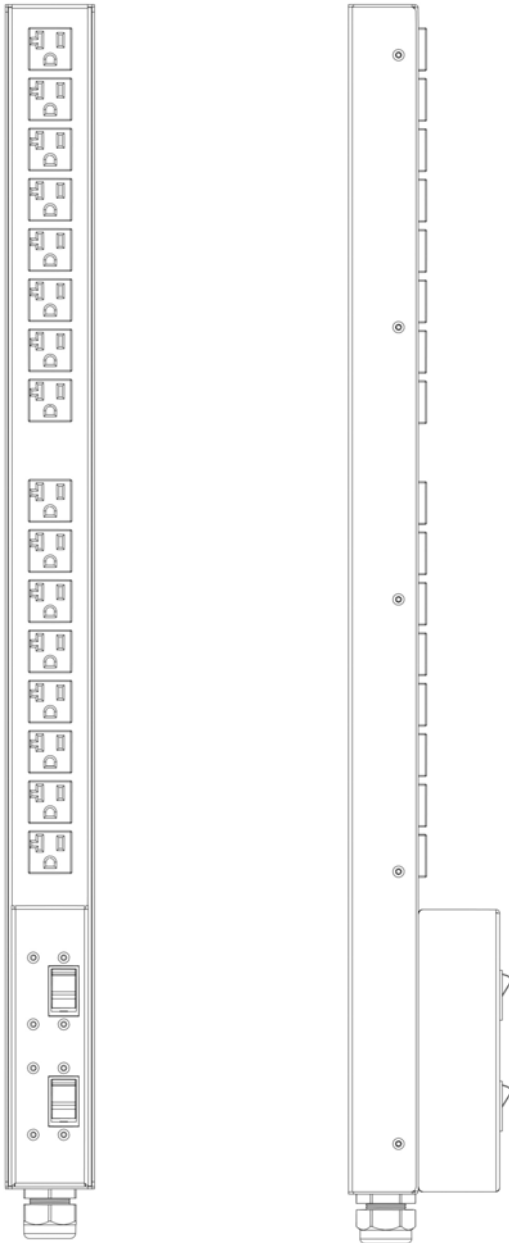

## Model: PB13016-01

Product Family:  Basic  
 Metered  
 Monitored (IP Access)  
 Switched (IP Control)

Input Ratings	
Voltage	100 - 120V 60/50Hz
Amps	30 Amps
Breakers	(2) UL 489 20A
Meters on unit (amps)	N/A
Input Plug/Cord	NEMA L5-30P / 10' cord
Output Ratings	
Voltage	100 - 120V 60/50Hz
Outlets (Total)	(16) NEMA 5-20R
Outlets per Branch	(8) NEMA 5-20R
Load Segment Per Branch	20A
Total Power (kW)	2.8kW de-rated
Physical	
Form Factor	Vertical - Zero U
Height	29.5"
Width	2.18"
Depth	1.72" (outlets) 3.5" (breakers)
Weight	18lbs.
Regulatory	
UL60950-1, CSA22.2 No. 60950-1, EN60950-1	

Featured Options	
IP Receptacle Control (on/off/reboot)	No
IP Port Metering (amps@receptacle)	No
IP Environmental Monitoring	No

