


Power: Quick Specs



Overview

The PBD3030-01 provides three phase power distribution utilizing a combination of (24) IEC C13 & (6) IEC C19 outlets. Mounting is achieved in seconds using included tool-less mounting buttons.

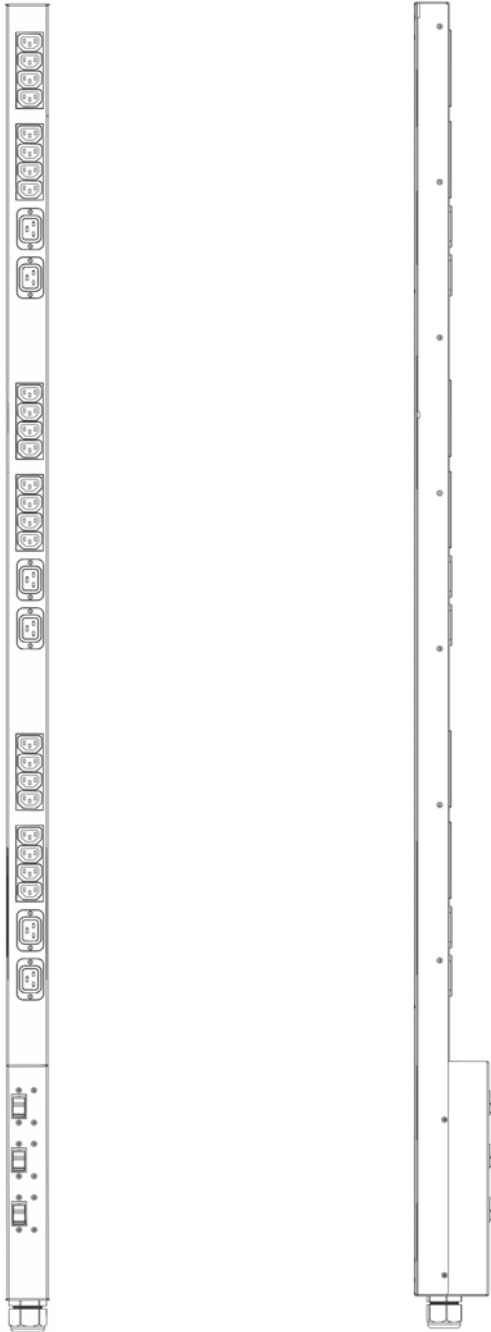

Model: PBD3030-01

Product Family: Basic
 Metered
 Monitored (IP Access)
 Switched (IP Control)

Input Ratings	
Voltage	3Ø Delta 208V 60/50Hz
Amps	30 Amps
Circuit Breakers	(3) 20A UL 489 Listed
Meters on unit (amps)	N/A
Input Plug/Cord	NEMA L15-30P/10'
Output Ratings	
Voltage	208V 60/50Hz
Outlets (Total)	(24) C13 & (6) C19
Outlets per phase	(8) C13 & (2) C19
Load Segment Per Phase	20A
Total Power (kW)	8.6kW de-rated
Physical	
Form Factor	Vertical - Zero U
Height	66.5"
Width	2.18"
Depth	1.72"(Outlets) 3.5"(Breakers)
Weight	15lbs.
Regulatory	
UL60950-1, CSA22.2 No. 60950-1, EN60950-1	

Featured Options	
IP Receptacle Control (on/off/reboot)	No
IP Port Metering (amps@receptacle)	No
IP Environmental Monitoring	No

