


Power: Quick Specs



Overview

The PB23024-02 provides single phase power distribution utilizing a combination of (20) IEC C13 & (4) IEC C19 outlets. Mounting is achieved in seconds using included tool-less mounting buttons.

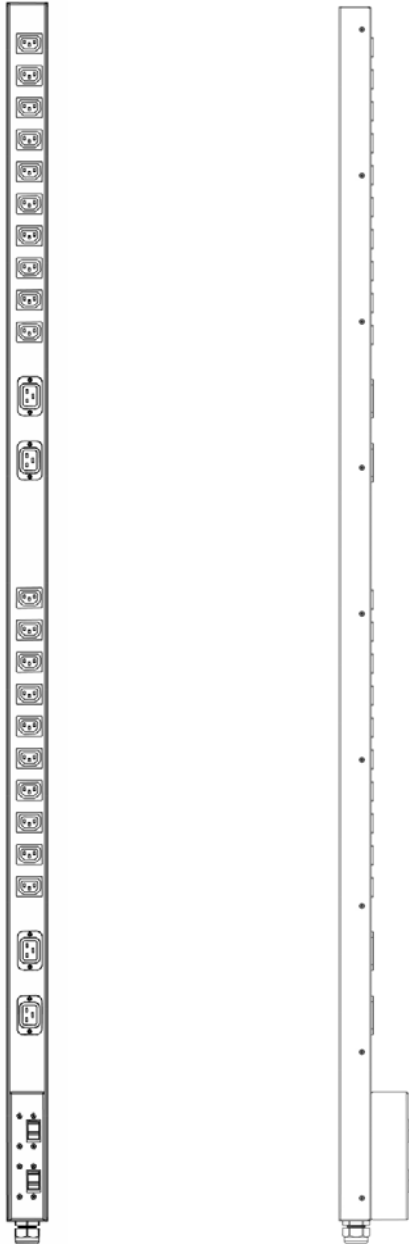

Model: PB23024-02

Product Family: Basic
 Metered
 Monitored (IP Access)
 Switched (IP Control)

| Input Ratings | |
|---|---------------------------------|
| Voltage | 208V 60/50Hz |
| Amps | 30 Amps |
| Breakers | (2) UL 489 20A |
| Meters on unit (amps) | N/A |
| Input Plug/Cord | NEMA L6-30P / 10' cord |
| Output Ratings | |
| Voltage | 208V 60/50Hz |
| Outlets (Total) | (20) IEC C13 (4) IEC C19 |
| Outlets per Branch | (10) IEC C13 (2) IEC C19 |
| Load Segment Per Phase | 20A |
| Total Power (kW) | 4.9kW de-rated |
| Physical | |
| Form Factor | Vertical - Zero U |
| Height | 66.5" |
| Width | 2.18" |
| Depth | 1.72" (outlets) 3.5" (breakers) |
| Weight | 15lbs. |
| Regulatory | |
| UL60950-1, CSA22.2 No. 60950-1, EN60950-1 | |

| Featured Options | |
|---------------------------------------|----|
| IP Receptacle Control (on/off/reboot) | No |
| IP Port Metering (amps@receptacle) | No |
| IP Environmental Monitoring | No |

