


Power: Quick Specs



Overview

The PM12010-01 PDU provides single phase power distribution utilizing a combination of (10) NEMA 5-20 outlets. Local current (Amp) metering is achieved via industry leading "True RMS" digital ammeter. Horizontal flush mount brackets and hardware included.

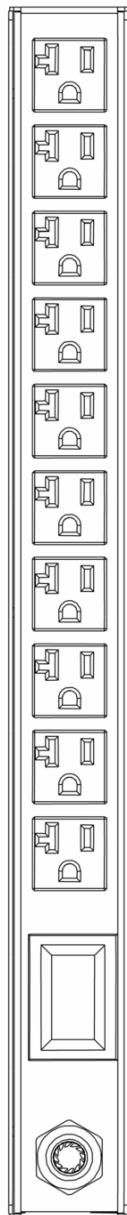

Model: PM12010-01

Product Family: Basic
 Metered
 Monitored (IP Access)
 Switched (IP Control)

Input Ratings	
Voltage	120V 60/50Hz
Amps	20 Amps
Breakers	N/A
Meters on unit (amps)	1 "True RMS" Ammeter
Input Plug/Cord	NEMA L5-20P / 10' cord
Output Ratings	
Voltage	120V 60/50Hz
Outlets (Total)	(10) NEMA 5-20R
Outlets per phase	(10) NEMA 5-20R
Load Segment Per Phase	20A
Total Power (kW)	1.9kW de-rated
Physical	
Form Factor	Horizontal
Height	17.5"
Width	1.72"
Depth	1.72"
Weight	8lbs.
Regulatory	
UL60950-1, CSA22.2 No. 60950-1, EN60950-1 FCC Class A Part 15	

Featured Options	
IP Receptacle Control (on/off/reboot)	No
IP Port Metering (amps@receptacle)	No
IP Environmental Monitoring	No

